



Printer Registration manual for On-demand (QR/NFC)


—CT4-LX—

1. Configure the SOS setting


(1) Display SOS menu

Settings ⇒ Interface ⇒ Network ⇒ Services ⇒ Online Services

(2) Set SOS Mode as "On-Demand"

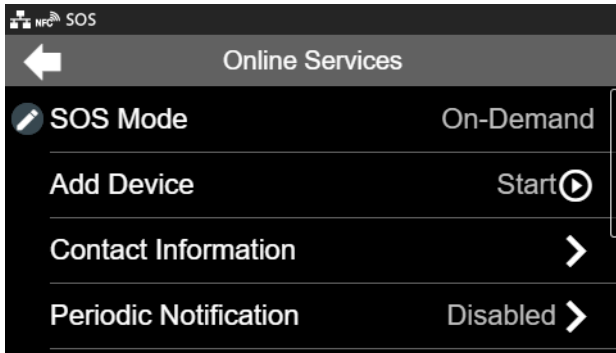


(3) Select "Add Device" and keep showing QR code(Serial Number on the display)

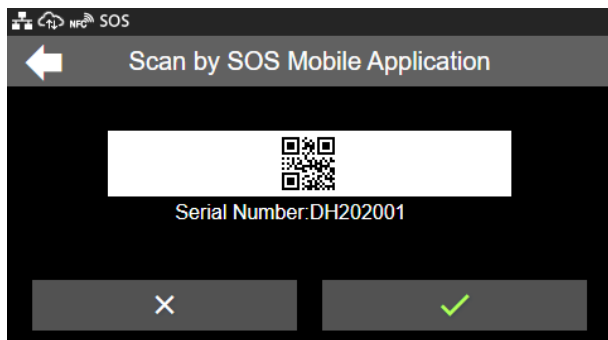

Printer registration with SOS Smart App

1. Log in to SOS Smart App

- Startup SOS Smart App and log-in. Select Add printer.
- Select "On-demand".

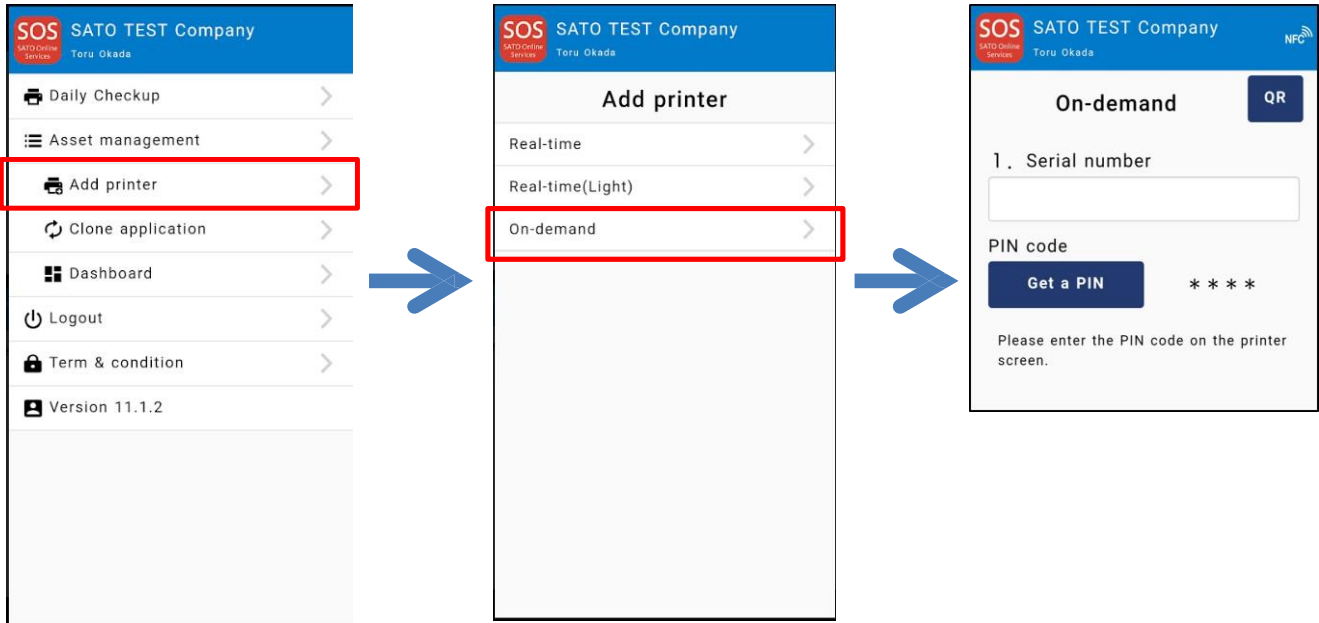


2. Scan **NFC/QR Code**

<Case 1:NFC>

Please make sure that NFC icon is blinking. If not, please check your mobile that NFC function is enabled.

make sure that the NFC icon is blinking.

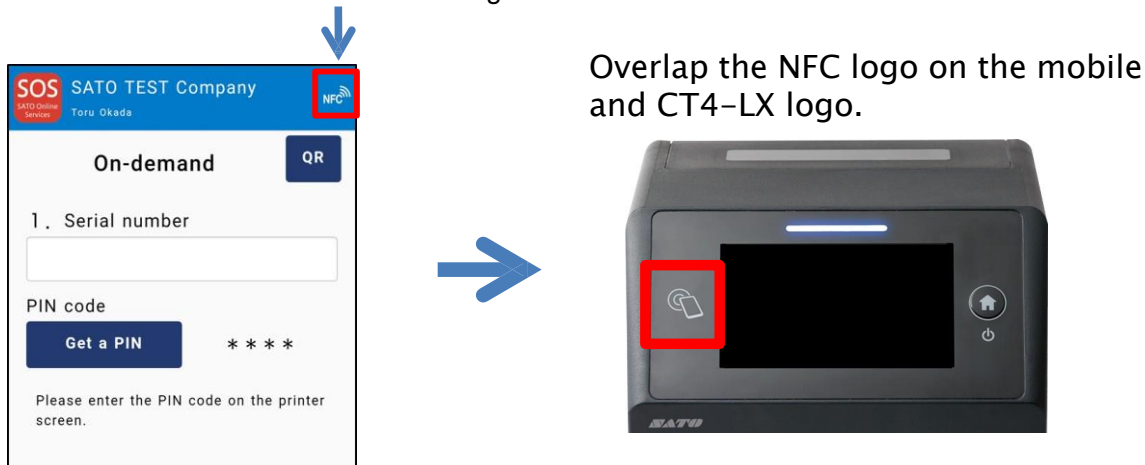



When NFC is scanned properly, Mobile App displays the registration page as following.
Make sure that the printer's serial number is correct. After that select the location.

(And modify a device name if necessary)

If it is OK, tap **Add** button.

The image shows two screenshots of the SATO TEST Company mobile app. The left screenshot is the 'On-demand' registration screen. It has a blue header with 'SOS SATO TEST Company' and 'Toru Okada'. Below the header, there's a 'QR' button. The main content area has four numbered steps: 1. Serial number (input field with 'DH202001'), 2. Association code (input field), 3. Device name (input field with 'DH202001'), and 4. Location (dropdown menu with 'R&D office_1'). There's a 'Get a PIN' button and a 'PIN code' section with '****'. At the bottom is an 'Add' button. The right screenshot shows the same screen after completion. It has a message 'We have completed adding the pr...' and two buttons: 'Add another printer' and 'Return to menu'.

<Case 2:QR code>

If your mobile doesn't have NFC function, it is also available to register with Mobile App by using QR code.

1) Tap **QR** button then QR scanner will be launched.

Scan the QR code which is displayed on the printer. (1.-(3))

2) Tap **Get a PIN** button to show a PIN code which needs to enter on the printer.

The image shows three screenshots of the SATO TEST Company mobile app. The first screenshot is the 'On-demand' screen with the 'QR' button highlighted. The second screenshot is a QR scanner interface with the text 'Scan by SOS Mobile Application' and 'Serial Number:DH202001'. The third screenshot is the 'On-demand' screen with the 'Get a PIN' button highlighted.



3) Tap **QR** button(bottom) then, QR scanner will be launched again.

SOS SATO TEST Company
Toru Okada

On-demand **QR**

1. Serial number
DH202001

PIN code
Get a PIN 5820

Please enter the PIN code on the printer screen.

2. Association code **QR**


Please enter the association code displayed on the printer screen. Or please read the QR code.

3. Device name
DH202001


4. Location
Berlin Factory

Add


4) Tap **✓** button on the printer.

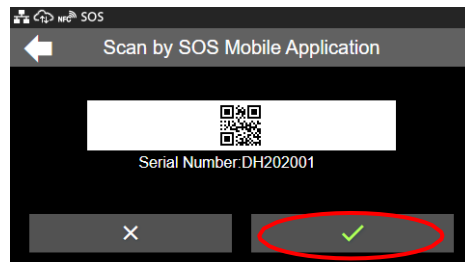

6) Scan QR code with mobile.

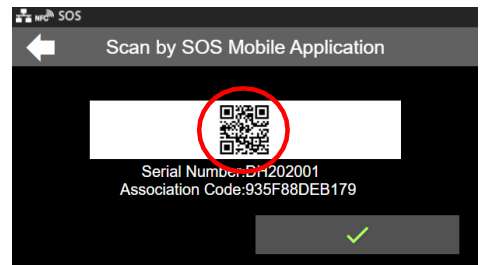

5) Enter PIN code

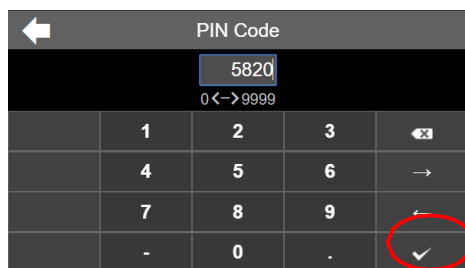

7) Select "Location" and modify a Device name if necessary.

After that, tap **Add** button and then the registration is complete.

Please make sure that the printer is on the device list.(menu > dashboard)

SOS SATO TEST Company
Toru Okada

On-demand **QR**

1. Serial number
DH202001

PIN code
Get a PIN 5820

Please enter the PIN code on the printer screen.

2. Association code **QR**
935F88DEB179

Please enter the association code displayed on the printer screen. Or please read the QR code.

3. Device name
DH202001

4. Location
R&D office_1

Add

SOS SATO TEST Company
Toru Okada

On-demand

We have completed adding the pr...

1. Serial number
DH202001

2. Association code
935F88DEB179

3. Device name
DH202001

4. Location
R&D office_1

Add another printer

Return to menu

SOS SATO TEST Company

Dashboard / Device list

Display 1 to 3 of 3

Search: DH202001

Asset management list

Device list

Serial number	Device name	SOS type
DH202001	DH202001	On-demand

Top Back 1 Next Last

Copyright © SATO HOLDINGS CORPORATION. All rights reserved.



Printer registration from PC

1. Login to SATO Online Services

Login URL will be provided from SATO or your Business Partner.

Enter email address and password.

2. Register Locations

(1) Go to "Manage Locations" and click  button.



(2) Enter necessary information and click  to complete.

3. Register printer

(1) Go to "+ Add device" and select "On-demand/Light" as following.



(2) Enter Serial number and click **Code** button, then shows the PIN code.

After that, enter this PIN code to the printer.

get PIN code | get association code | Add on-demand/Light printer | Completed to add a printer

[Serial number] displayed on the printer screen is necessary. Please refer to the following URL
<https://document-bag.sato-sos.com/manual.pdf#page=16>
Enter the serial number and click on "Code" to display the PIN code. You can obtain [Association Code] by entering the PIN code on the printer screen.

Serial number* DH202001 **Code**

PIN code 5 8 2 0

* Input required

Next

Printer display

← PIN Code

5820

0<->9999

	1	2	3	⌫
	4	5	6	→
	7	8	9	←
	-	0	.	✓

(3) Enter a printer information.

After fill in the required information, click **Add** button.

get PIN code | get association code | Add on-demand/Light printer | Completed to add a printer

Please enter the [Association code] here. It is required to enter the PIN code on the printer first. before getting that code
<https://document-bag.sato-sos.com/manual.pdf#page=16>

Serial number DH202001

PIN code 5820

Association code* 935F88DEB179

Device name* Test CT4-LX

Location* R&D office_1

Memo1 DEMO UNIT

Memo2

Memo3

* Input required

Add

Required items

- Serial number
 - Association code
 - Device name
 - Location
- in order to identify the printer
where the printer is installed

Registration completed



get PIN code | get association code | Add on-demand/Light printer | Completed to add a printer

Completed

Serial number : DH202001



4. Confirm the registraion

Go to "Device list" from the menu and check the printer.

The screenshot shows the SATO SOS web interface. At the top, there is a header with a '+ Add device' button and a user profile for 'Toru Okada' with email 'peechannel@gmail.com'. A dropdown menu is open, showing options: 'Dashboard', 'Device list' (circled in red), 'Company information', 'Manage locations', 'Contact us', and 'Logout'. Below the menu, a table displays the 'Device list'. The table has columns: 'Serial number', 'Device name', 'SOS type', 'Model name', 'Status', 'Location', and 'Last connection date'. The first row is highlighted with a red border and contains the following data: 'DH202001', 'Test CT4-LX', 'Real-time(Light)', 'CT4-LX TT 305dpi', 'OFFLINE', 'R&D office_1', and '2019-12-19 09:15:52'. Above the table, there are buttons for 'Asset management list' and 'Device list', and a search bar containing 'DH202001' (circled in red).

Serial number	Device name	SOS type	Model name	Status	Location	Last connection date
DH202001	Test CT4-LX	Real-time(Light)	CT4-LX TT 305dpi	OFFLINE	R&D office_1	2019-12-19 09:15:52

Registration process is complete.

Please refer below URL link for more information.

https://www.sato-sos.com/en/support/sos_usermanual.pdf