



Printer registration manual

On-demand for S8NX

October 24, 2022

Ver. 1.0



Table of Contents

1. Revision History	3
2. Introduction.....	4
3. Add the printer to SOS account.....	4
4. Confirmation.....	9



2. Introduction

Before using SOS, SOS account is necessary.

Please contact nearest SATO local office or our contracted business partners



Push the power button on the control panel until the LED lights up in blue and turn on the printer.

An initial icon “SOS” is displayed at the top of the printer screen. However the printer is not yet connected with SATO. Please add the printer to your SOS account as following steps..

3. Add the printer to SOS account

3-1. Push the power button on the control panel until the LED lights up in blue and turn on the printer.

Then press  left key or  OFFLINE key and set a printer to “OFFLINE”.


3-2. Press  Enter Key.

3-3. Select “Interface” by using   key. Then Press  Enter key.







3-4. Select "Network" by using ▲▼key. Then press ←Enter key.

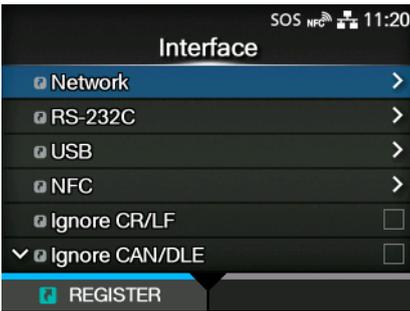

3-5. Select "Services" by using ▲▼key. Then press ←Enter key.

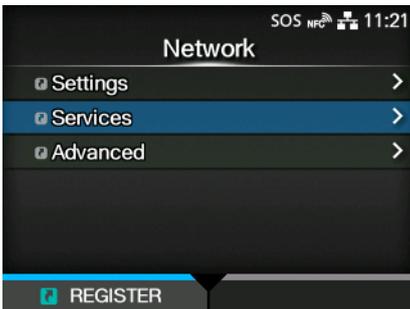


3-6. Select "Online Services" by using ▲▼key. Then press ←Enter key.

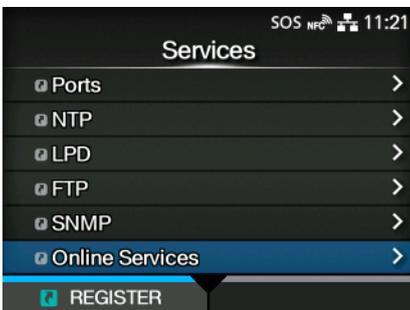

*If "Online Services" menu is not displayed.
Please contact nearest SATO office and install a latest firmware


3-7. Change SOS mode and choose SOS Association

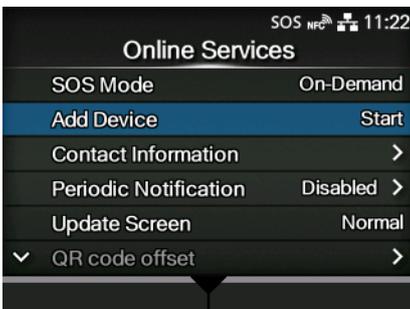

1. *Change "SOS Mode" to "On-Demand" from "Disable"
2. Press "SOS Association"



3-8. Serial Number is shown.

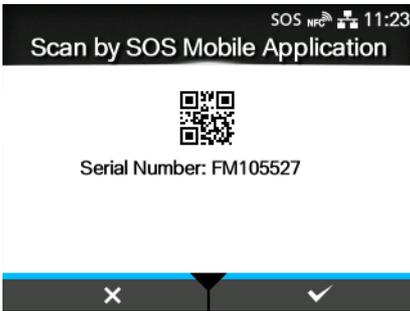


Press right key to move next screen.

*To register your printer, Serial Number is necessary.


Recommend to note this Serial No.

3-9. Input PIN code.

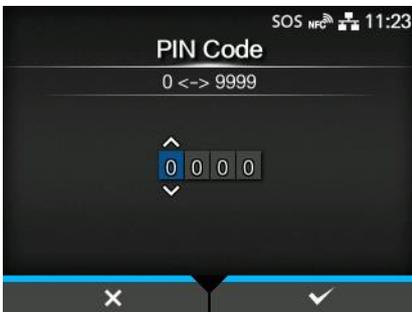

Login to SATO Online Services and get PIN code with following process.

3-10. Login to SATO Online Services

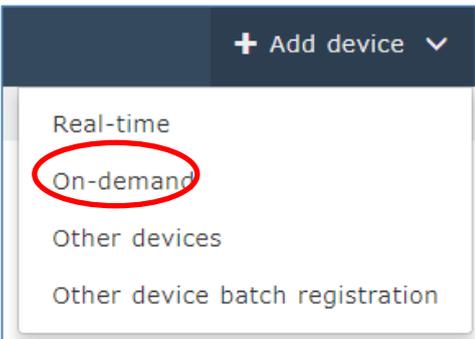


Login to your SOS account,

*Logn URLis provided SATO or business partners

*Select "On-Demand" from main menu.




3-11. Input the serial number

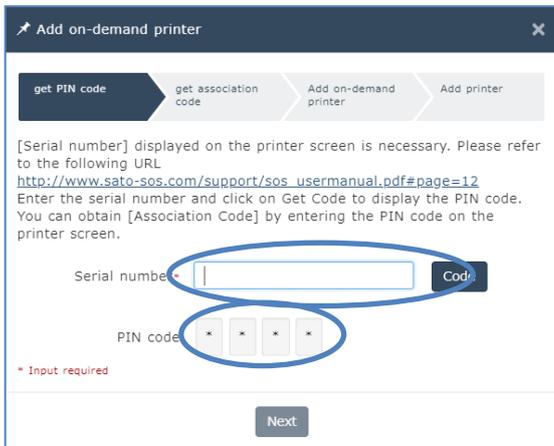

- Serial Number input screen is shown. Then input the printer serial number and press “Code” button.


PIN code is shown. Recommend to note it.

3-12. Go to printer LCD and Input PIN to printer.

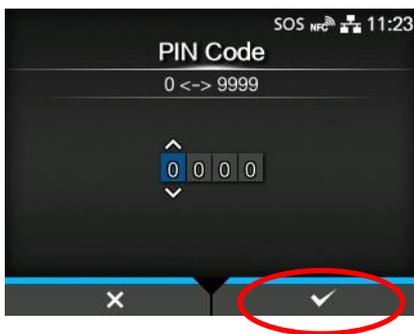

- Input PIN code to printer.
- Press Right key to go to next screen.

3-13. Association Code is displayed.

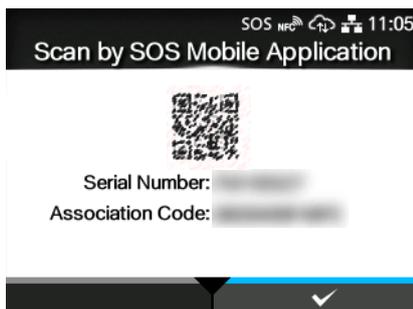

- Serial Number and Association Code are displayed
- Press “Next” button at “Add on-demand printer” screen.



3-14. Go to Web screen and enter association code.

Serial number: KITAMURA
PIN code: 3053
Association code: 61CDB31A582C
Device name: Ki Print
Location: Malaysia Factory
Memo1:
Memo2:
Memo3:
* Input required
Add

•"Enter "Association code" on Web screen And input Association code that displayed on LCD.

•Then input other items "Device name" and "Location". And press "Add" button to finish.

Completed
Serial number : KITAMURA

* The above registration process can also be performed from SOS Smart App (application for SOS smartphone). Also, if you have implemented from SOS Smart App, it is convenient to input the association code by QR code reading function.

For details, refer to the SOS Smart App manual.

https://www.sato-sos.com/en/support/sos_usermanual_mobile.pdf



4. Confirmation

Check the “Device list” of SATO Online Services show operated serial number.

The screenshot shows the 'Device list' page in the SATO Online Services interface. The page title is 'SOS_GMC01_company01'. The breadcrumb navigation is 'Dashboard / Device list'. A search filter is applied: 'Serial number(Partial Match) = KITAMURA'. Below the search filter, there are two buttons: 'Asset management list' and 'Device list'. The page displays 'Display 1 to 1 of 1'. A table with 7 columns is shown: Serial number, Location, Device name, SOS type, Model name, Status, and Life counter. The table contains one row with the following data: KITAMURA, Malaysia Factory, Ki Print, On-demand, CL6NX 203dpi, and empty cells for Status and Life counter.

Serial number	Location	Device name	SOS type	Model name	Status	Life counter
KITAMURA	Malaysia Factory	Ki Print	On-demand	CL6NX 203dpi		

Registration process is completed.

Please see following manual for check other information.

https://www.sato-sos.com/en/support/sos_usermanual.pdf