



## Printer Registration manual for On-demand (QR/NFC)


—CT4-LX—

### 1. Configure the SOS setting


(1) Display SOS menu

Settings ⇒ Interface ⇒ Network ⇒ Services ⇒ Online Services

(2) Set SOS Mode as "On-Demand"

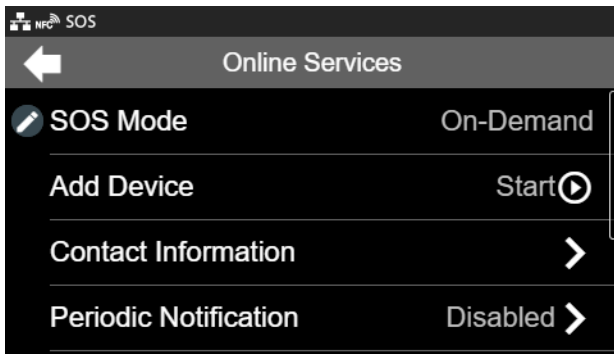


(3) Select "Add Device" and keep showing QR code(Serial Number on the display)

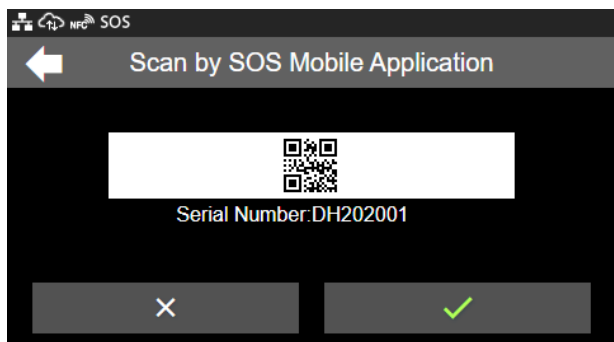

## Printer registration with SOS Smart App

### 1. Log in to SOS Smart App

- Startup SOS Smart App and log-in. Select Add printer.
- Select "On-demand".

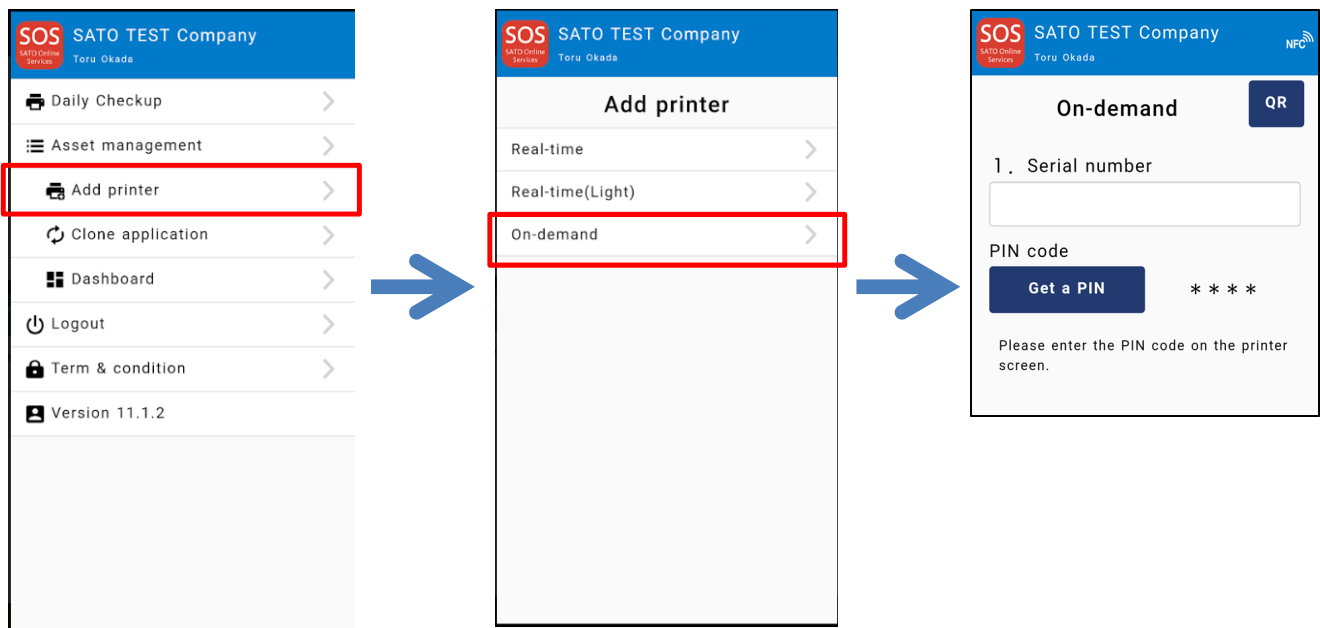

### 2. Scan NFC/QR Code

<Case 1:NFC>

Please make sure that NFC icon is blinking. If not, please check your mobile that NFC function is enabled.

make sure that the NFC icon is blinking.



Overlap the NFC logo on the mobile and CT4-LX logo.





When NFC is scanned properly, Mobile App displays the registration page as following.  
Make sure that the printer's serial number is correct. After that select the location.

(And modify a device name if necessary)

If it is OK, tap **Add** button.

The left screenshot shows the 'On-demand' registration form. It has a header with 'SOS SATO TEST Company' and 'Toru Okada'. Below the header is a 'QR' button. The form has five sections: 1. Serial number (DH202001), PIN code (Get a PIN button), Association code (QR button), Device name (DH202001), and Location (R&D office\_1). The 'Add' button is at the bottom. The right screenshot shows the confirmation screen with the text 'We have completed adding the pr...'. It has the same header and 'QR' button. Below the text are the same five sections as the left screenshot. At the bottom are two buttons: 'Add another printer' and 'Return to menu'.

### <Case 2:QR code>

If your mobile doesn't have NFC function, it is also available to register with Mobile App by using QR code.

1) Tap **QR** button then QR scanner will be launched.

Scan the QR code which is displayed on the printer. (1.-(3))

2)Tap **Get a PIN** button to show a PIN code which needs to enter on the printer.

The first screenshot shows the 'On-demand' registration form with the 'QR' button highlighted. The second screenshot shows the QR scanner interface with the text 'Scan by SOS Mobile Application' and 'Serial Number:DH202001'. The third screenshot shows the 'On-demand' registration form with the 'Get a PIN' button highlighted.



3) Tap **QR** button(bottom) then, QR scanner will be launched again.

**SOS SATO TEST Company**  
Toru Okada

**On-demand** **QR**

1. Serial number  
DH202001

PIN code  
**Get a PIN** 5820

Please enter the PIN code on the printer screen.

2. Association code **QR**


Please enter the association code displayed on the printer screen.  
Or please read the QR code.

3. Device name  
DH202001


4. Location  
Berlin Factory

**Add**


4) Tap **✓** button on the printer.

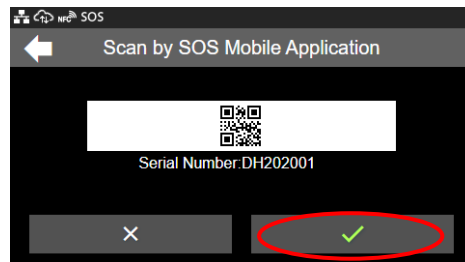

6) Scan QR code with mobile.

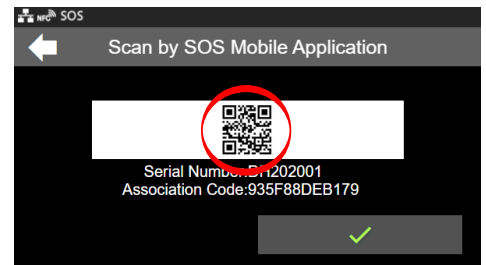

5) Enter PIN code

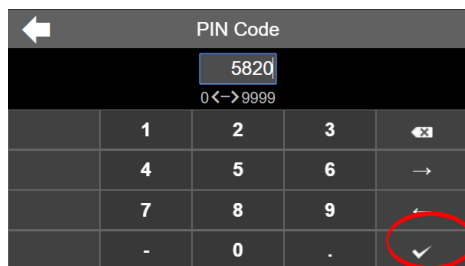

7) Select "Location" and modify a Device name if necessary.

After that, tap **Add** button and then the registration is complete.

Please make sure that the printer is on the device list.(menu > dashboard)

**SOS SATO TEST Company**  
Toru Okada

**On-demand** **QR**

1. Serial number  
DH202001

PIN code  
**Get a PIN** 5820

Please enter the PIN code on the printer screen.

2. Association code **QR**  
935F88DEB179

Please enter the association code displayed on the printer screen.  
Or please read the QR code.

3. Device name  
DH202001

4. Location  
R&D office\_1

**Add**

**SOS SATO TEST Company**  
Toru Okada

**On-demand**

We have completed adding the pr...

1. Serial number  
DH202001

2. Association code  
935F88DEB179

3. Device name  
DH202001

4. Location  
R&D office\_1

**Add another printer**

**Return to menu**

**SOS SATO TEST Company**

**Dashboard / Device list**

Display 1 to 3 of 3

Search: DH202001

**Asset management list**

**Device list**

Serial number	Device name	SOS type
DH202001	DH202001	On-demand

Top Back 1 Next Last

Copyright © SATO HOLDINGS CORPORATION. All rights reserved.



## Printer registration from PC

### 1. Login to SATO Online Services

Login URL will be provided from SATO or your Business Partner.

The login page features a dark blue header with the SATO logo and a language dropdown set to 'English'. The main content area has a white background with a login form. The form includes fields for 'E-mail' and 'password', a 'Stay logged in' checkbox, and a 'Login' button. A 'Forgot password' link is located next to the password field. A welcome message and a password reset notice are displayed above the form. The footer contains copyright information for SATO HOLDINGS CORPORATION.

Enter email address and password.

### 2. Register Locations

(1) Go to "Manage Locations" and click button.

The user menu is open, showing the user's name 'SOS\_GMC01\_company01\_admin' and email 'sos\_gmc01\_company01\_user001@yahoo.co.jp'. The menu options are: Dashboard, Device list, Company information, Manage locations (highlighted with a red circle), Contact us, and Logout.



The 'Add location' form contains several input fields: 'Location name', 'Country' (dropdown menu showing 'United Kingdom'), 'Postal code', 'Address', 'Division', 'PIC', 'Contact number', and 'Memo'. An 'Add' button is at the bottom right. A red asterisk indicates that input is required for all fields.

(2) Enter necessary information and click to complete.

### 3. Register printer

(1) Go to "+ Add device" and select "On-demand/Light" as following.

The '+ Add device' dropdown menu is open, showing four options: 'Real-time', 'On-demand/Light' (highlighted with a red circle), 'Other devices', and 'Other device batch registration'.



(2) Enter Serial number and click **Code** button, then shows the PIN code.

After that, enter this PIN code to the printer.

get PIN code   get association code   Add on-demand/Light printer   Completed to add a printer

[Serial number] displayed on the printer screen is necessary. Please refer to the following URL  
<https://document-bag.sato-sos.com/manual.pdf#page=16>  
Enter the serial number and click on "Code" to display the PIN code. You can obtain [Association Code] by entering the PIN code on the printer screen.

Serial number\* DH202001   **Code**

PIN code   5   8   2   0

\* Input required

**Next**

Printer display

←   PIN Code

5820

0 <-> 9999

	1	2	3	⌫
	4	5	6	→
	7	8	9	←
	-	0	.	✓

(3) Enter a printer information.

After fill in the required information, click **Add** button.

get PIN code   get association code   Add on-demand/Light printer   Completed to add a printer

Please enter the [Association code] here. It is required to enter the PIN code on the printer first. before getting that code  
<https://document-bag.sato-sos.com/manual.pdf#page=16>

Serial number   DH202001

PIN code   5820

Association code\*   935F88DEB179

Device name\*   Test CT4-LX

Location\*   R&D office\_1

Memo1   DEMO UNIT

Memo2

Memo3

\* Input required

**Add**

### Required items

- Serial number
- Association code
- Device name  
in order to identify the printer
- Location  
where the printer is installed

### Registration completed

get PIN code   get association code   Add on-demand/Light printer   Completed to add a printer


Completed

Serial number : DH202001



#### 4. Confirm the registraion

Go to "Device list" from the menu and check the printer.

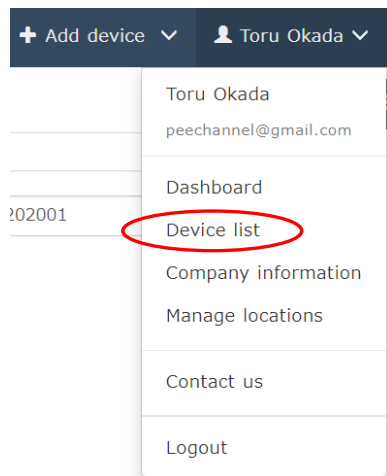

Display 1 to 3 of 3			Asset management list		Device list		DH202001
Serial number	Device name	SOS type	Model name	Status	Location	Last connection date	
DH202001	Test CT4-LX	Real-time(Light)	CT4-LX TT 305dpi	OFFLINE	R&D office_1	2019-12-19 09:15:52	

Registration process is complete.

Please refer below URL link for more information.

[https://www.sato-sos.com/en/support/sos\\_usermanual.pdf](https://www.sato-sos.com/en/support/sos_usermanual.pdf)